

EnerChip™ CC 50μAh with Integrated Power Management**Features**

- Power Manager with Charge Control
- Integrated 50μAh Thin Film Energy Storage
- Built-in Energy Storage Protection
- Temperature Compensated Charge Control
- Adjustable Switchover Voltage
- Charges Integrated EnerChip Over a Wide Supply Range
- Low Standby Power
- SMT - Lead-Free Reflow Tolerant
- Thousands of Recharge Cycles
- Low Self-Discharge
- Eco-Friendly, RoHS Compliant

Applications

- Standby supply
- Wireless sensors and RFID tags
- Localized power source
- Power Bridging
- Consumer appliances
- Business and industrial systems
- Energy Harvesting

Part Numbering Example: CCBC3150 T- A5

CCBC3150	T	D9C	A5
SERIES	SHIPPING PKG	PACKAGE STYLE	OPERATING TEMP.
	T = Tube Z1 = 1K Z5 = 5K	D9C = 20-pin D9 DFN	-20°C to +70°C

Operating Characteristics

PARAMETER		CONDITION	MIN	TYPICAL	MAX	UNITS
Output Voltage V _{OUT}		V _{DD} > V _{TH}	-	V _{DD}	-	V
Output Voltage V _{OUT} (backup mode)		V _{DD} < V _{TH}	2.2	3.3	3.6	V
EnerChip Pulse Discharge Current		-	Variable - see App. Note 1025			-
Self-Discharge (5 yr average)		Non-recoverable	-	2.5	-	% per year
		Recoverable	-	1.5 ⁽¹⁾	-	% per year
Operating Temperature		-	-20	25	+70	°C
Storage Temperature		-	-40	-	+125 ⁽²⁾	°C
Cell Resistance (25 °C)		Charge cycle 2	-	0.75	2	kΩ
		Charge cycle 1000	-	4.2	7	
Recharge Cycles (to 80% of rated capacity; 4.1 V charge voltage)	25 °C	10% depth-of-discharge	5000	-	-	cycles
		50% depth-of discharge	1000	-	-	cycles
	40 °C	10% depth-of-discharge	2500	-	-	cycles
		50% depth-of-discharge	500	-	-	cycles
Recharge Time (to 80% of rated capacity; 4.1V charge voltage; 25 °C)		Charge cycle 2	-	20	35	minutes
		Charge cycle 1000	-	60	95	
Capacity		100μA discharge; 25 °C	50	-	-	μAh

1. First month recoverable self-discharge is 4% average.

2. Storage temperature is for uncharged EnerChip™ CC device

Note: All specifications contained within this document are subject to change without notice

Electrical Properties

EnerChip™ Backup Output Voltage:	3.3V
Energy Capacity (typical):	50μAh
Recharge time to 80%:	20 minutes
Charge/ Discharge cycles:	>5000 to 10% discharge

Physical Properties

Package size:	9mm x 9mm
Operating temperature:	-20°C to +70°C
Storage temperature:	-40°C to +125°C

The EnerChip™ CC is the world's first Intelligent Thin Film Energy Storage Device. It is an integrated solution that provides backup energy storage and power management for systems requiring power bridging and/or secondary power. The EnerChip™ CC is essentially a UPS in a Chip drop solution

During normal operation, the EnerChip™ CC charges itself with a controlled voltage using an internal charge pump that operates from 2.5V to 5.5V. An ENABLE pin allows for activation and deactivation of the charge pump using an external control line in order to minimize current consumption and take advantage of the fast recharge time of the EnerChip™.



9mm x 9mm DFN SMT
Package

When the primary power supply dips below a user-defined threshold voltage, the EnerChip CC will signal this event and route the EnerChip™ voltage to VOUT. The EnerChip™ CC also has energy storage protection circuitry to enable thousands of recharge cycles.

The CCBC3150 is a 20-pin, 9mm x 9mm Dual Flat No-lead (DFN) package, available in tubes, trays, or tape-and-reel for use with automatic insertion equipment.

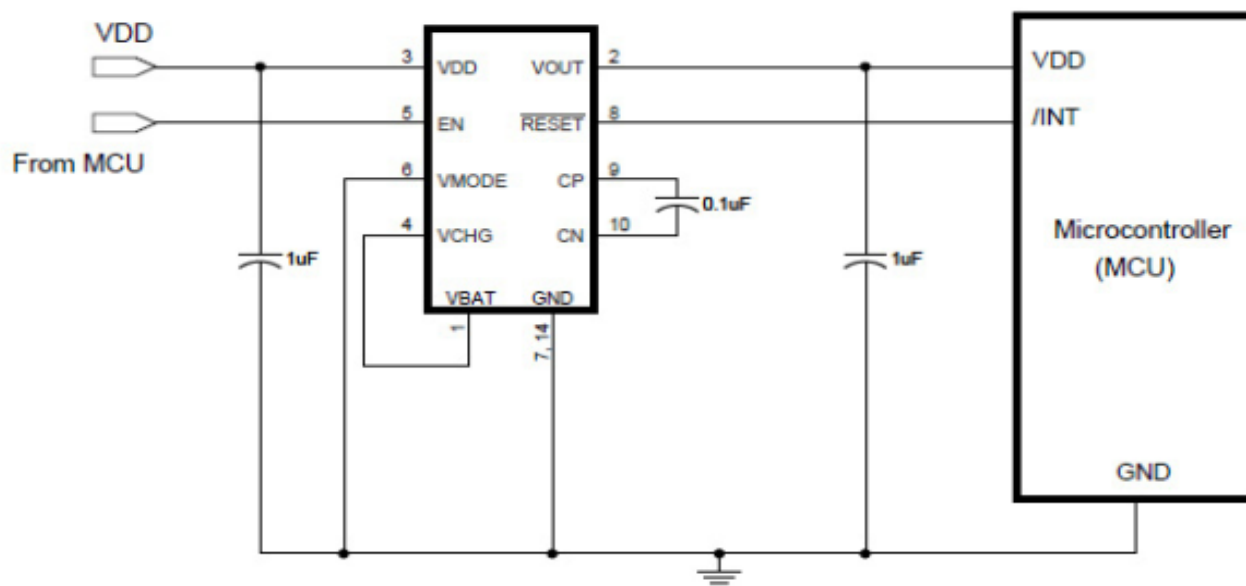


Figure 1: Typical EnerChip™ CC Application Circuit

Functional Block Diagram

The EnerChip™ CC internal schematic is shown in Figure 2. The input voltage from the power supply (VDD) is applied to the charge pump, the control logic, and is compared to the user-set threshold as determined by the voltage on VMODE. VMODE is an analog input ranging from 0V to VDD. The ENABLE pin is a digital input that turns off the charge pump when low. VOUT is either supplied from VDD or the integrated EnerChip™ energy storage device. RESET is a digital output that, when low, indicates VOUT is being sourced by the integrated EnerChip™.

CFLY is the flying capacitor in the voltage doubler circuit. The value of CFLY can be changed if the output impedance of the EnerChip™ CC needs to be modified. The output impedance is dictated by $1/fC$, where f is the frequency of oscillation (typically 100kHz) and C is the capacitor value (typically 0.1μF). GND is system ground.

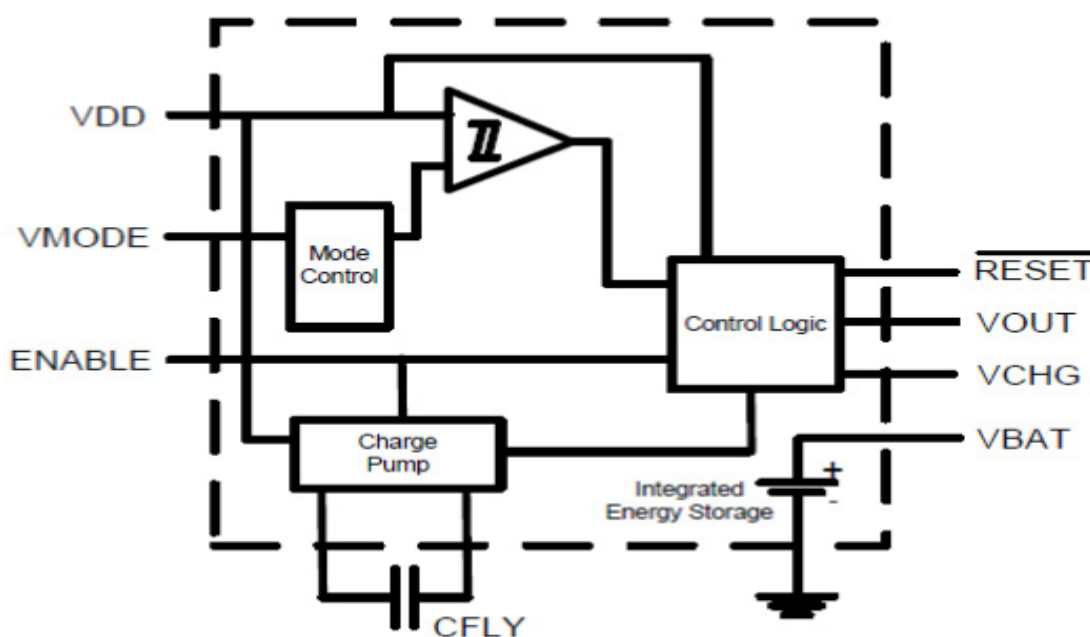


Figure 2: EnerChip™ CC CCBC3150 Internal Block Diagram

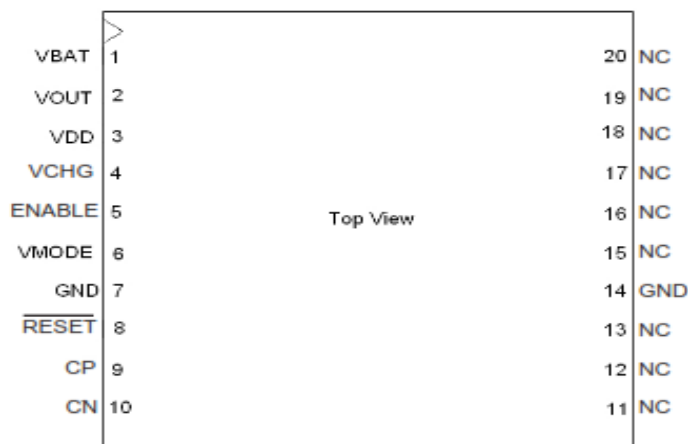


Figure 3: EnerChip™ CC CCBC3150 Package Pin-Out

CCBC3150-D9C Input/Output Descriptions



Pin Number	Label	Description
1	VBAT	Positive EnerChip Terminal - Tie to Pin 4
2	VOUT	System Voltage
3	VDD	Input Voltage
4	VCHG	EnerChip Charge Voltage - Tie to Pin 1 and/or Optional EnerChip(s)
5	ENABLE	Charge Pump Enable
6	VMODE	Mode Select for Backup Switchover Threshold
7	GND	System Ground
8	RESET	Reset Signal (Active Low)
9	CP	Flying Capacitor Positive
10	CN	Flying Capacitor Negative
11	NC	No Connection
12	NC	No Connection
13	NC	No Connection
14	GND	System Ground
15	NC	No Connection
16	NC	No Connection
17	NC	No Connection
18	NC	No Connection
19	NC	No Connection
20	NC	No Connection

Absolute Maximum Ratings

PARAMETER	CONDITION	MIN	TYPICAL	MAX	UNITS
VDD with respect to GND	25 °C	GND - 0.3	-	6.0	V
ENABLE and VMODE Input Voltage	25 °C	GND - 0.3	-	VDD+0.3	V
VBAT ⁽¹⁾	25 °C	3.0	-	4.15	V
VCHG ⁽¹⁾	25 °C	3.0	-	4.15	V
VOUT	25 °C	GND-0.3	-	6.0	V
RESET Output Voltage	25 °C	GND - 0.3	-	VOUT+0.3	V
CP, Flying Capacitor Voltage	25 °C	GND - 0.3	-	6.0	V
CN	25 °C	GND - 0.3	-	VDD+0.3	V

(1) No external connections to these pins are allowed, except parallel EnerChips™.

Note: All specification contained within this document are subject to change without notice.

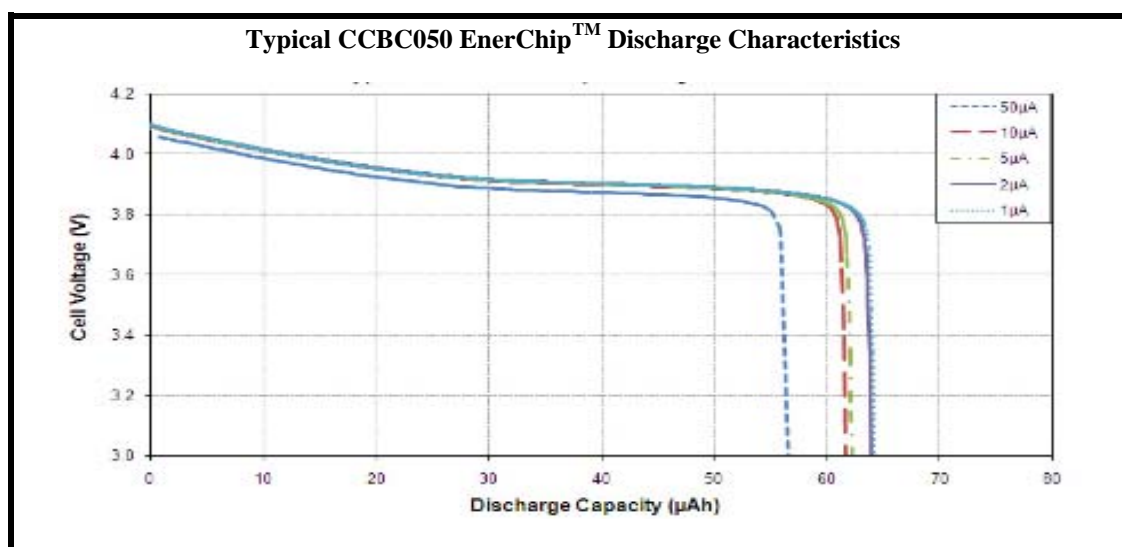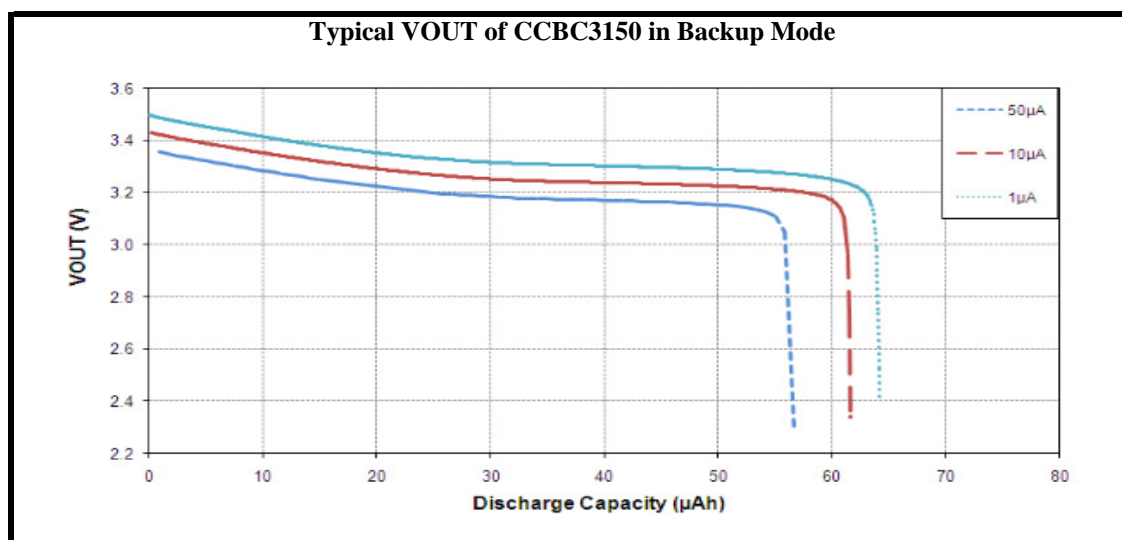

Power Supply Current Characteristics

Ta = -20°C to +70°C

CHARACTERISTIC	SYMBOL	CONDITION		MIN	MAX	UNITS
Quiescent Current	I _Q	ENABLE=GND	V _{DD} =3.3V	-	3.5	μA
			V _{DD} =5.5V	-	6.0	μA
		ENABLE=V _{DD}	V _{DD} =3.3V	-	35	μA
			V _{DD} =5.5V	-	38	μA
EnerChip Cutoff Current	I _{QBATOFF}	V _{BAT} < V _{BATCO} , V _{OUT} =0		-	0.5	nA
	I _{QBATON}	V _{BAT} > V _{BATCO} , ENABLE=V _{DD} , I _{OUT} =0		-	42	nA

Interface Logic Signal Characteristics
 $V_{DD} = 2.5V \text{ to } 5.5V, T_a = -20^{\circ}C \text{ to } +70^{\circ}C$

CHARACTERISTIC	SYMBOL	CONDITION	MIN	MAX	UNITS
High Level Input Voltage	V_{IH}	-	$V_{DD} - 0.5$	-	Volts
Low Level Input Voltage	V_{IL}	-	-	0.5	Volts
High Level Output Voltage	V_{OH}	$V_{DD} > V_{TH}$ (see Figures 4 and 5) $I_L = 10\mu A$	$V_{DD} - 0.04V^{(1)}$	-	Volts
Low Level Output Voltage	V_{OL}	$I_L = -100\mu A$	-	0.3	Volts
Logic Input Leakage Current	I_{IN}	$0 < V_{IN} < V_{DD}$	-1.0	+1.0	nA

(1) $RESET$ tracks V_{DD} ; $RESET = V_{DD} - (I_{OUT} \times R_{OUT})$.

RESET Signal AC/DC Characteristics
 $V_{DD} = 2.5V \text{ to } 5.5V, T_a = -20^{\circ}C \text{ to } +70^{\circ}C$

CHARACTERISTIC	SYMBOL	CONDITION	MIN	MAX	UNITS
V_{DD} Rising to \overline{RESET} Rising	t_{RESETH}	V_{DD} rising from 2.8V TO 3.1V in $<10\mu s$	60	200	ms
V_{DD} Falling to \overline{RESET} Falling	t_{RESETL}	V_{DD} falling from 3.1V to 2.8V in $<100ns$	0.5	2	μs
Mode 1 TRIP V V_{DD} Rising	V_{RESET}	$V_{MODE} = GND$	2.80	3.20	V
Mode 2 TRIP V V_{DD} Rising	V_{RESET}	$V_{MODE} = V_{DD}/2$	2.25	2.60	V
\overline{RESET} Hysteresis Voltage $^{(3)}$ (V_{DD} to \overline{RESET})	V_{HYST}	$V_{MODE} = V_{DD}$	60	100	mV
		$V_{MODE} = GND$	45	75	
		$V_{MODE} = V_{DD}/2$	30	50	

(2) Users- selectable trip voltage can be set by placing a resistor divider from the V_{MODE} pin to GND. Refer to Figure 8.

(3) The hysteresis is a function of trip level in Mode 2. Refer to Figure 9.

Charge Pump Characteristics

$V_{DD} = 2.5V$ to $5.5V$, $T_a = -20^{\circ}C$ to $+70^{\circ}C$

CHARACTERISTIC	SYMBOL	CONDITION	MIN	MAX	UNITS
ENABLE= V_{DD} to Charge Pump Active	t_{CPON}	ENABLE to 3rd charge pump pulse, $V_{DD}=3.3V$	60	80	μs
ENABLE Falling to Charge Pump Inactive	t_{CPOFF}	-	0	1	μs
Charge Pump Frequency	f_{CP}		-	120	KHz ⁽¹⁾
Charge Pump Resistance	R_{CP}	Delta V_{BAT} , for I_{BAT} charging current of $1\mu A$ to $100\mu A$ $C_{FLY}=0.1\mu F$, $C_{BAT}=1.0\mu F$	150	300	Ω
V_{CHG} Output Voltage	V_{CP}	$C_{FLY}=0.1\mu F$, $C_{BAT}=1.0\mu F$, $I_{OUT}=1\mu A$, Temp= $+25^{\circ}C$	4.075	4.125	V
V_{CHG} Temp. Coefficient	T_{CCP}	$I_{OUT}=1\mu A$, Temp= $+25^{\circ}C$	-2.0	-2.4	mV/ $^{\circ}C$
Charge Pump Current Drive	I_{CP}	$I_{BAT}=1mA$ $C_{FLY}=0.1\mu F$, $C_{BAT}=1.0\mu F$	1.0	-	mA
Charge Pump on Voltage	V_{ENABLE}	ENABLE= V_{DD}	2.5	-	V

(1) $f_{CP} = 1/CPPER$

Additional Characteristics

$T_a = -20^{\circ}C$ to $+70^{\circ}C$

CHARACTERISTIC	SYMBOL	CONDITION	LIMITS		UNITS
			MIN	MAX	
V_{BAT} Cutoff Threshold	V_{BATCO}	$I_{OUT}=1\mu A$	2.75	3.25	V
Cutoff Temp. Coefficient	T_{CCO}	-	+1	+2	mV/ $^{\circ}C$
V_{BAT} Cutoff Delay Time	t_{COOFF}	V_{BAT} from 40mV above to 20mV below V_{BATCO} $I_{OUT}=1\mu A$	40	-	ms
V_{OUT} Dead Time, V_{DD} Rising ⁽²⁾	t_{RSBR}	$I_{OUT}=1mA$ $V_{BAT}=4.1V$	0.2	2.0	μs
V_{OUT} Dead Time, V_{DD} Falling ⁽²⁾	t_{RSBF}	$V_{BAT}=4.1V$	0.2	2.0	μs
Bypass Resistance	R_{OUT}	-	-	2.5	Ω

(2) Dead time is the period when the V_{OUT} pin is floating. Size the holding capacitor accordingly.

Note: All specification contained within this document are subject to change without notice.

Important timing diagrams for the EnerChip™ CC relationship between EnerChip™ Switchover Timing and EnerChip™ Disconnect from Load Timing are shown in Figure 4.

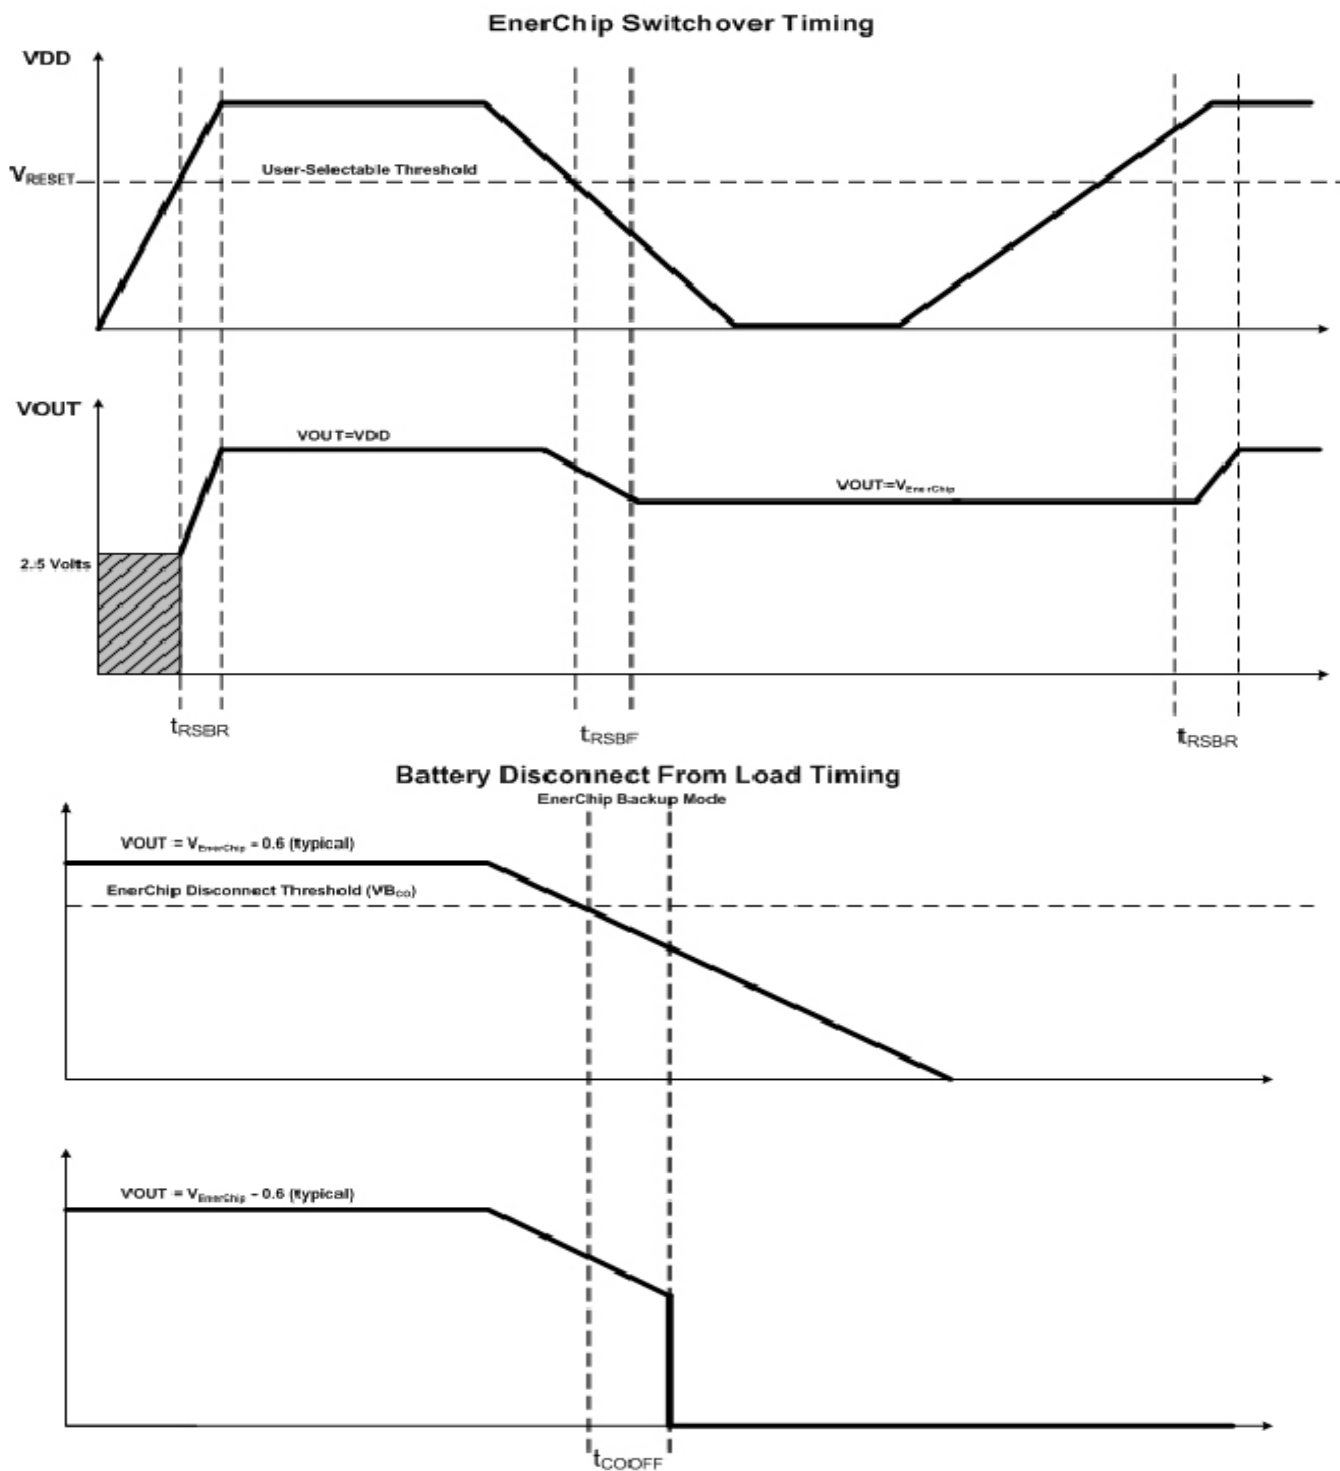


Figure 4. EnerChip™ CC Switchover and Disconnect Timing Diagrams

Timing diagrams for the EnerChip™ CC relationship between V_{DD} to RESET and ENABLE high to charge pump becoming active are shown in Figure 5.

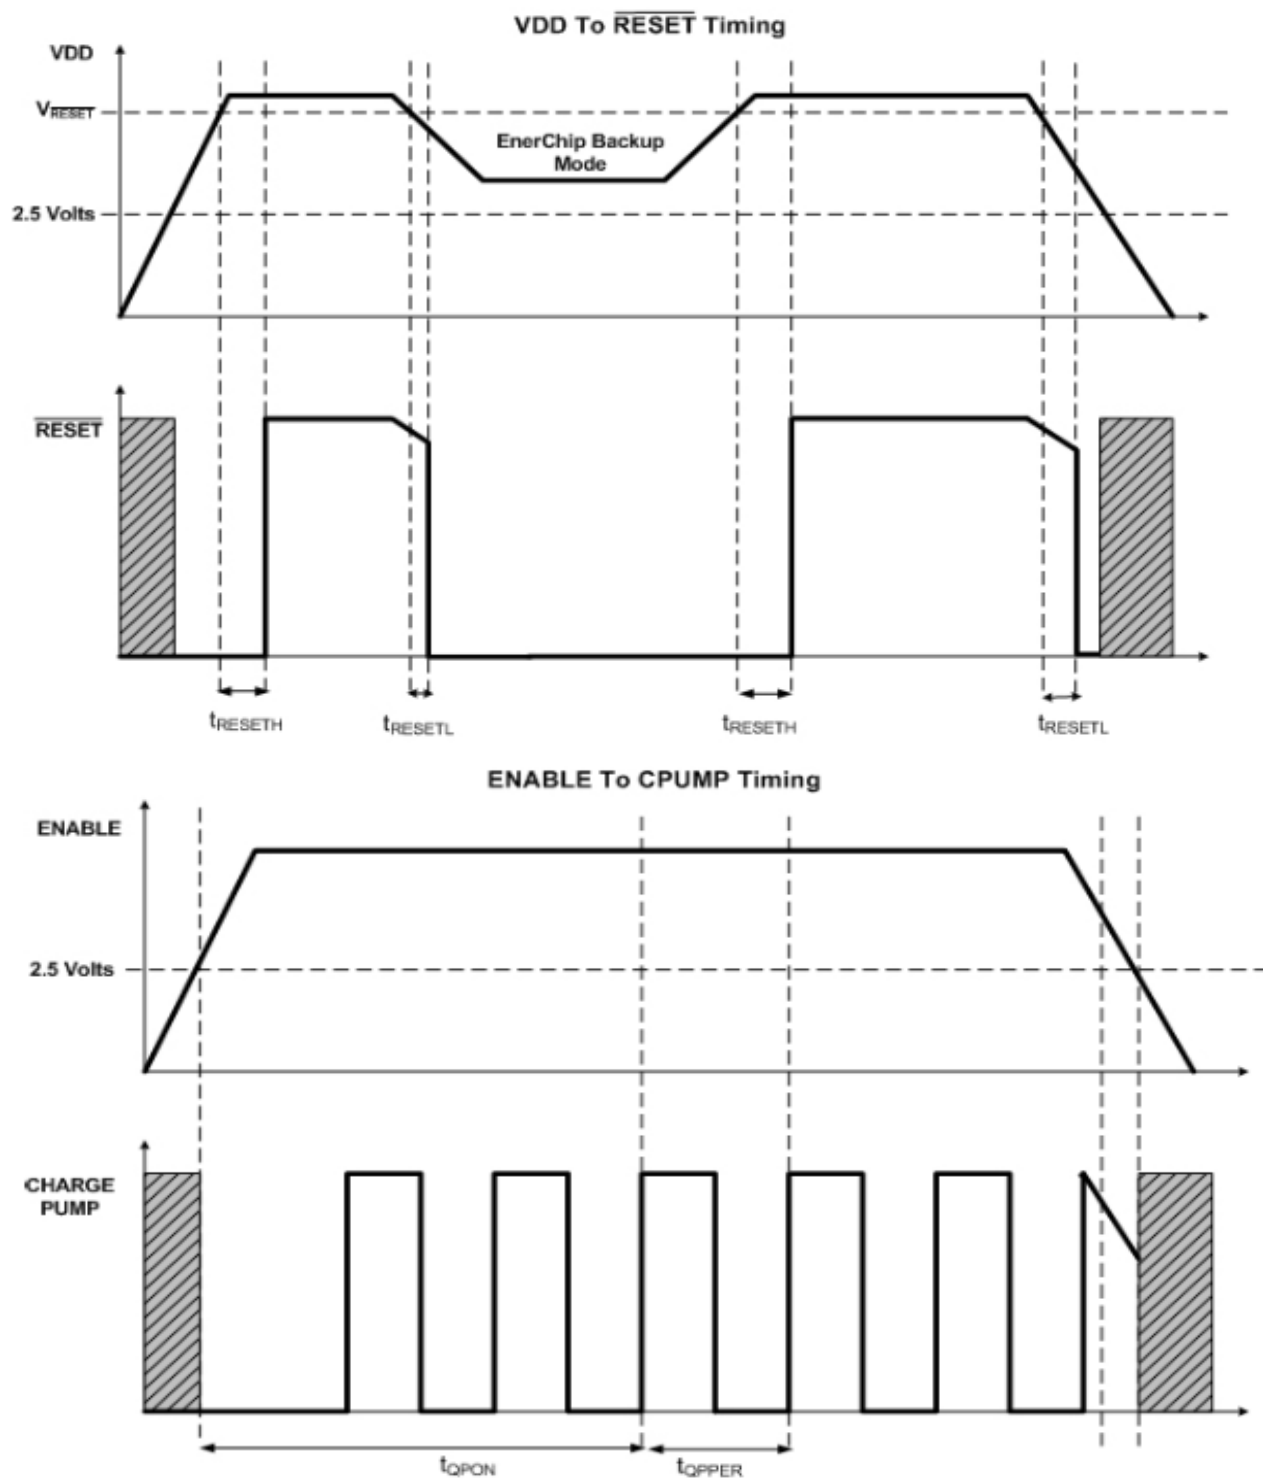


Figure 5. Timing Diagram for VDD to RESET and Enable to Charge Pump Active.

EnerChip™ CC Detailed Description

The EnerChip™ CC uses a charge pump to generate the supply voltage for charging the integrated energy storage device. An internal FET switch with low RDSON is used to route VDD to VOUT during normal operation when main power is above the switchover threshold voltage. When VDD is below the switchover threshold voltage, the FET switch is shut off and VOUT is supplied by the EnerChip™. An interrupt signal is asserted low prior to the switchover.

Operating Modes

The EnerChip™ CC can be operated from various power supplies such as a primary source or a non-rechargeable battery. With the ENABLE pin asserted high, the charge pump is active and charges the integrated EnerChip™. The EnerChip™ CC will be 80% charged within 20 minutes. Due to the rapid recharge it is recommended that, once the EnerChip™ CC is fully charged, the user de-assert the ENABLE pin (i.e., force low) to reduce power consumption. A signal generated from the MCU could be used to enable and disable the EnerChip™ CC.

When controlling the ENABLE pin by way of an external controller - as opposed to fixing the ENABLE line to VDD - ensure that the ENABLE pin is forced low by the controller anytime the RESET line is low, which occurs when the switchover threshold voltage is reached and the device is placed in backup mode. Although the internal charge pump is designed to operate below the threshold switchover level when the ENABLE line is active, it is recommended that the ENABLE pin be forced low whenever RESET is low to ensure no parasitic loads are placed on the EnerChip while in this mode. If ENABLE is high or floating while VDD is in an indeterminate state, bias currents within the EnerChip™ CC could flow, placing a parasitic load on the EnerChip™ that could dramatically reduce the effective backup operating time.

The EnerChip™ CC supports 2 operational modes as shown in Figure 6 and 7.

Mode 1 Operation

For use in 3.3 volt systems. The VMODE pin should be tied directly to GND, as shown in Figure 6. This will set the switchover threshold at approximately 3.0 volts.

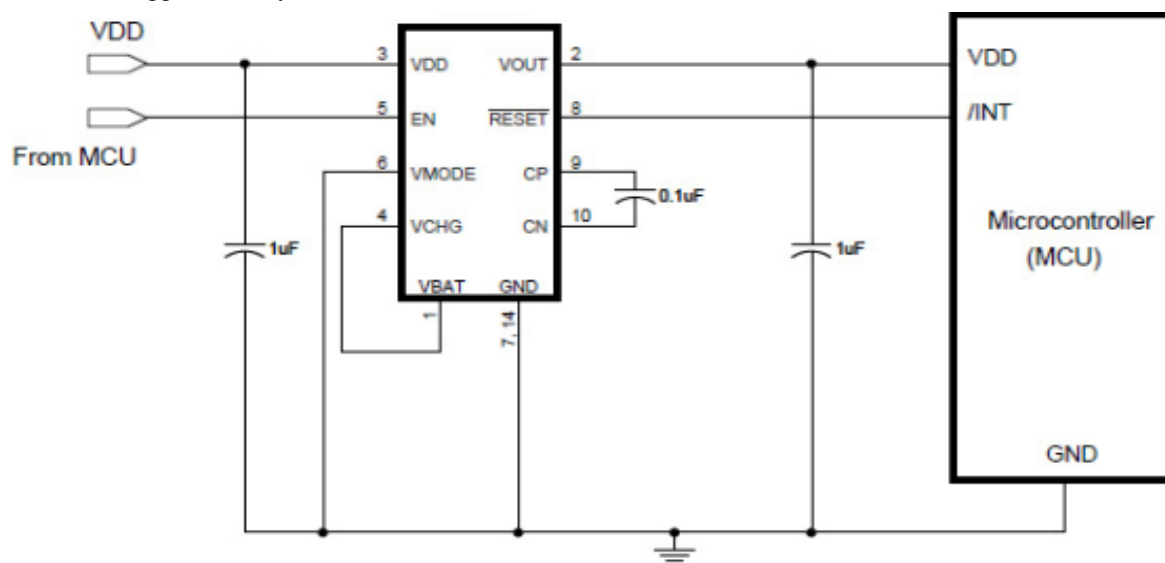


Figure 6: CCBC3150 Typical Circuit for Mode 1 Operation

Mode 2 Operation

Figure 7 shows the circuitry for user-selectable switchover threshold to a value between 2.5 and 5.0 volts. Use Figure 8 to determine the value of R1. To determine the amount of hysteresis from the EnerChip™ switchover threshold, use Figure 9.

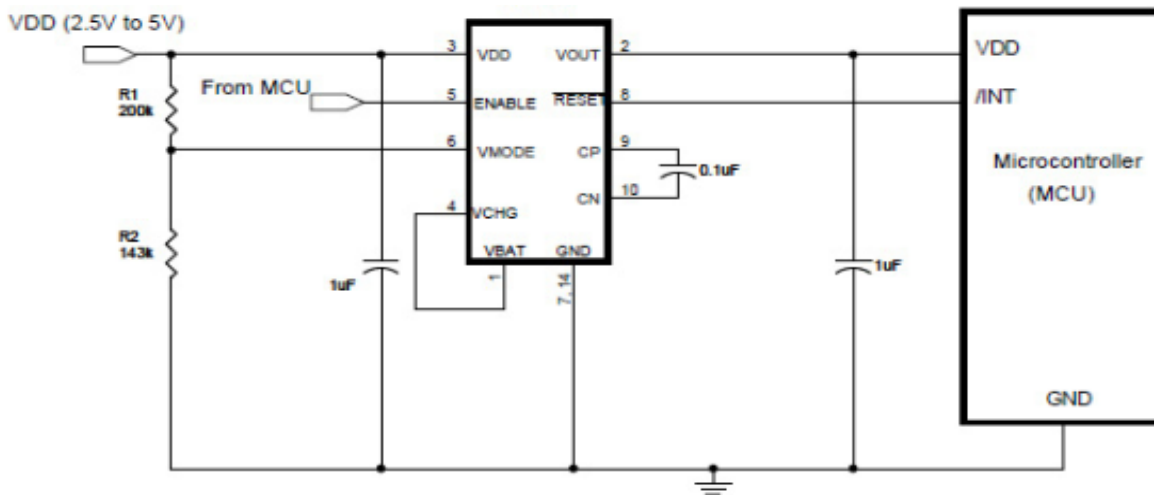


Figure 7: CCBC3150 Typical Circuit for Mode 2 Operation

EnerChip™ charging and backup power switchover threshold for 2.5 to 5.5 volt operation is selected by changing the value of R2 (see Figure 7). To determine the backup switchover point, set the value of R1 to 200kΩ and choose the value of R2 according to Figure 8. For example, to set a 3.0V trip point: If $R1 = 200\text{ k}\Omega$ then $R2 = R1 \times 0.72 = 144\text{ k}\Omega$. Figure 7 shows a Mode 2 circuit with standard value resistors of 200kΩ and 143kΩ.

To determine the backup switchover hysteresis for Mode 2 operation, use Figure 9.

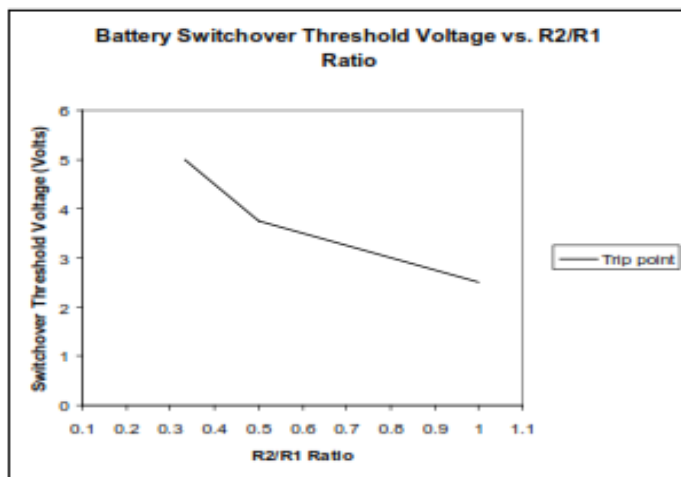


Figure 8. Mode 2 Resistor Selection Graph

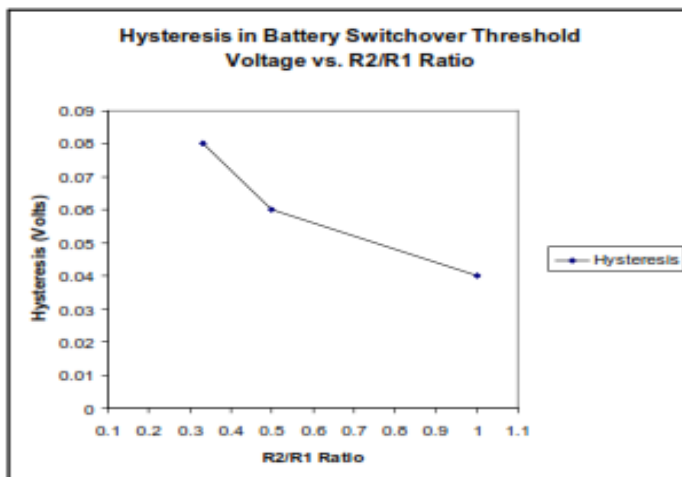


Figure 9. Mode 2 Hysteresis as a Function of R2/R1

Real-Time Clock Application Circuit

The EnerChip™ CC as depicted in Figure 10 is a typical application circuit in a 3.3 volt system where backup and power switchover circuitry for a real-time clock device is provided.

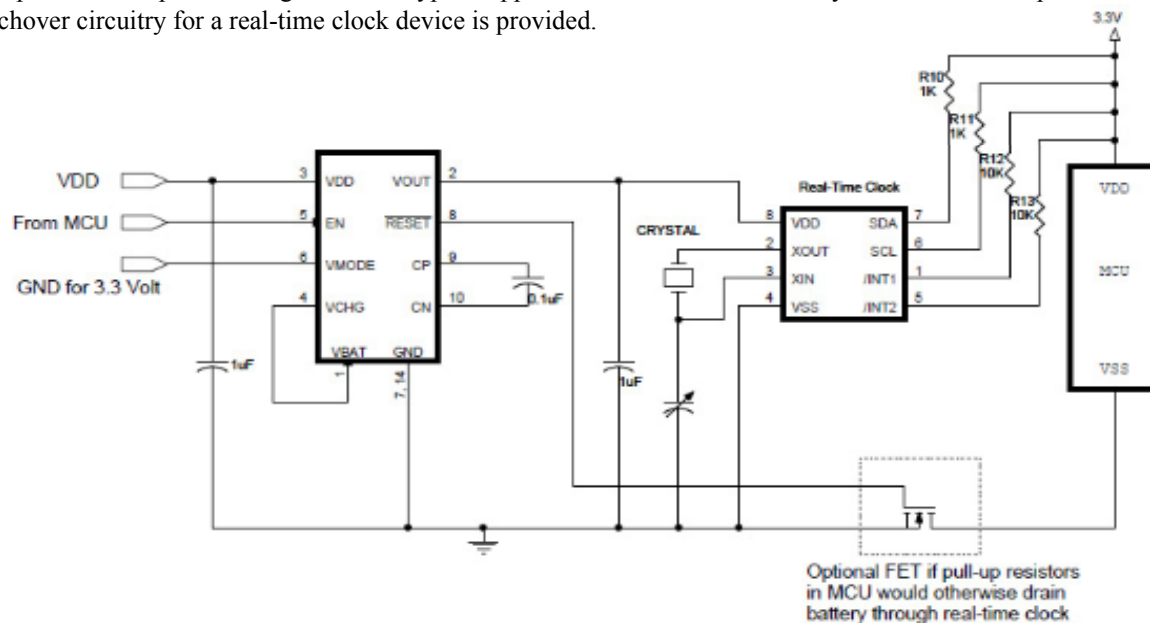


Figure 10: EnerChip™ CC Providing Backup Power

Adding Power and Energy Capacity with Parallel EnerChips™

In some applications, additional EnerChip™ capacity might be needed. The schematic in Figure 11 shows how multiple EnerChips™ can be supported in parallel by a single EnerChip™ CC CCBC3150. Note that CFLY should be increased by 0.1μF for every additional EnerChip™.

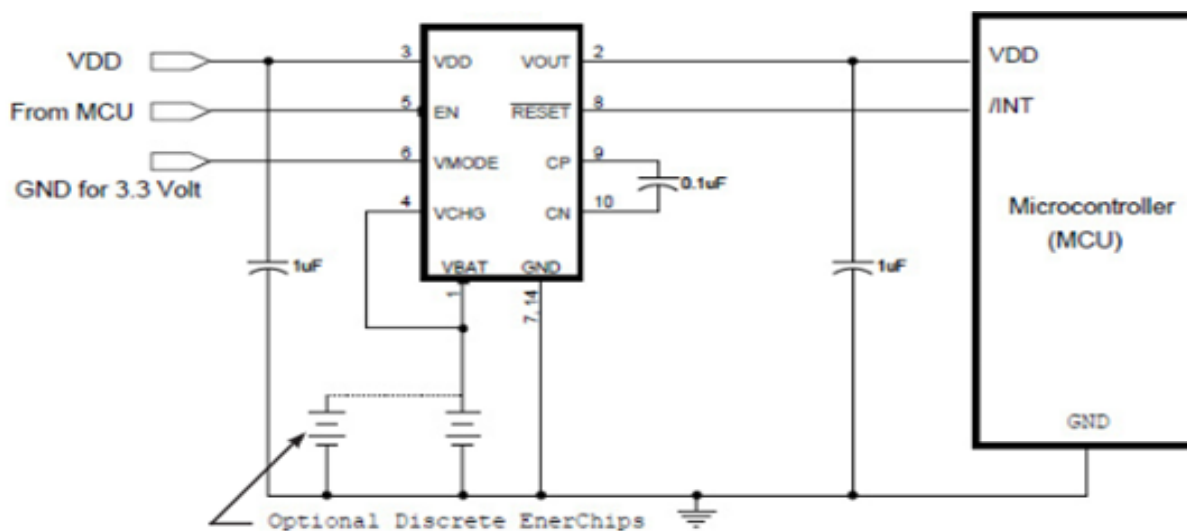


Figure 11: EnerChip™ CC Providing Power Management for Multiple EnerChips™

EnerChip™ CC CCBC3150 PCB Layout Guidelines - Important Notice!

There are several PCB layout considerations that must be taken into account when using the CCBC3150:

1. All capacitors should be placed as close as possible to the EnerChip™ CC. The flying capacitor connections must be as short as possible and routed on the same layer the EnerChip™ CC is placed.
2. Power connections should be routed on the layer the EnerChip™ CC is placed.
3. A ground (GND) plane in the PCB should be used for optimal performance of the EnerChip™ CC.
4. Very low parasitic leakage currents from the VBAT pin to power, signal, and ground connections, can result in unexpected drain of charge from the integrated power source. Maintain sufficient spacing of traces and vias from the VBAT pin and any traces connected to the VBAT pin in order to eliminate parasitic leakage currents that can arise from solder flux or contaminants on the PCB.
5. Pin 1 VBAT and Pin 4 VCHG must be tied together for proper operation.
6. There should be no traces, vias or connections under the CCBC3150 exposed die pad.
7. When placing a silk screen on the PCB around the perimeter of the package, place the silk screen outside of the package and all metal pads. Failure to observe this precaution can result in package cracking during solder reflow due to the silk screen material interfering with the solder solidification process during cooling.
8. The ENABLE pin must not be tied to V_{DD} or pulled high until the final reflow of the device has been completed. Failure to do so will result in damage to the battery.
9. See Figure 12 for location and dimensions of metal pad placement on the PCB.

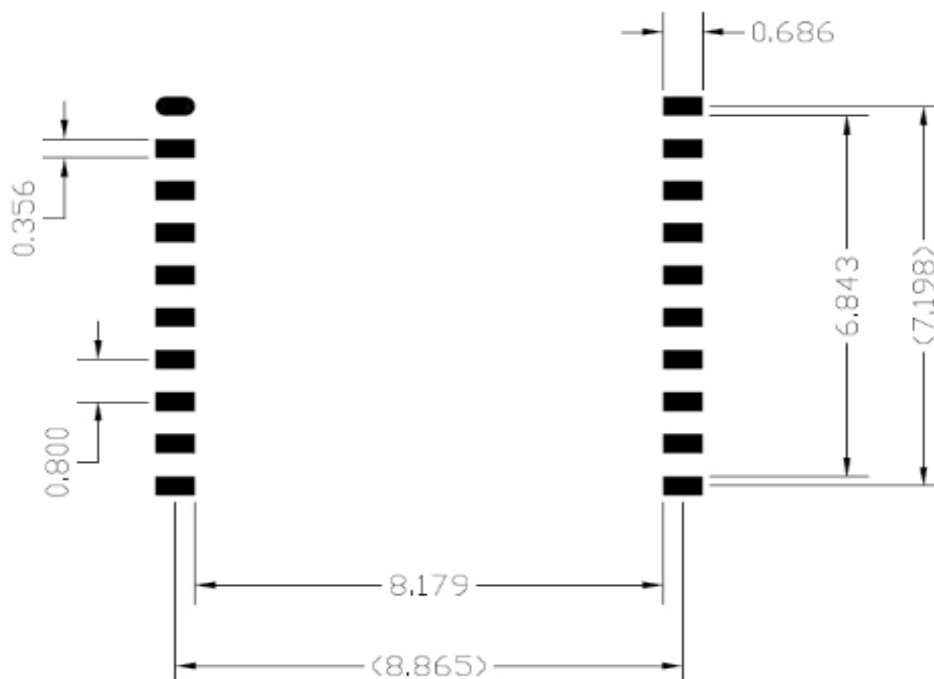
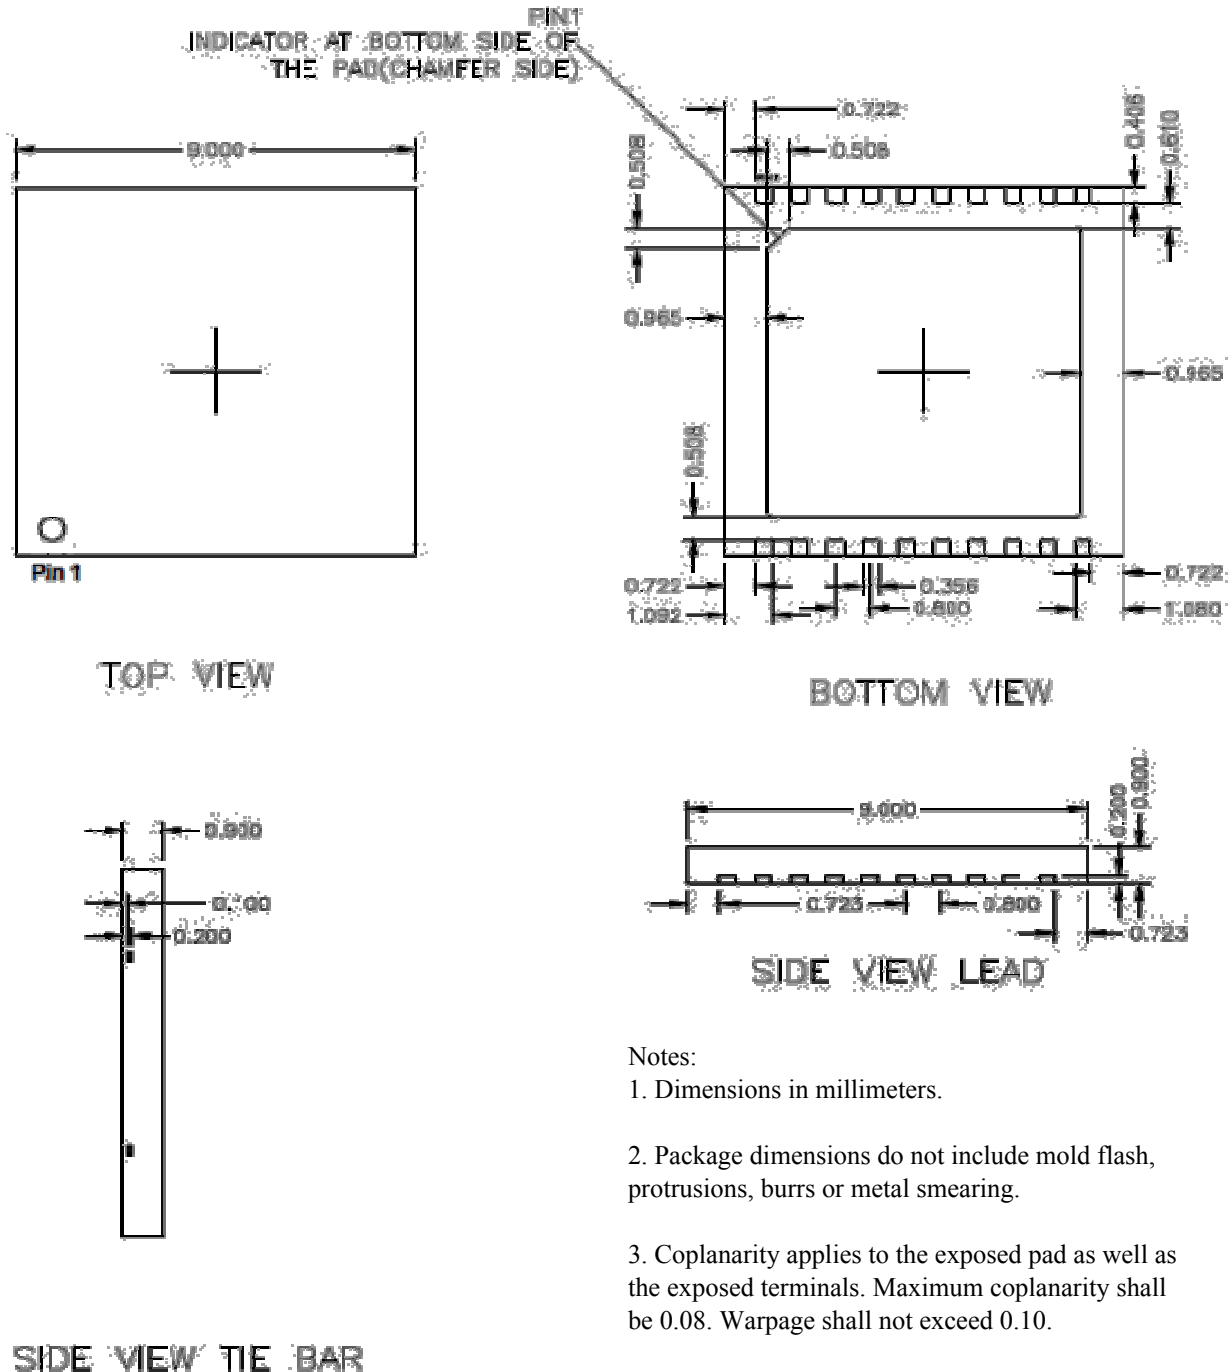


Figure 12: Recommend PCB Layout for the CBC3150-D9C Package (Dimensions in mm)

CCBC3150 9mm x 9mm DFN Package Drawing and Dimensions

Notes:

1. Dimensions in millimeters.
2. Package dimensions do not include mold flash, protrusions, burrs or metal smearing.
3. Coplanarity applies to the exposed pad as well as the exposed terminals. Maximum coplanarity shall be 0.08. Warpage shall not exceed 0.10.
4. Exposed metallized feature connected to die paddle.
5. There are 10 contact pads on two opposite sides and no contact pads on the other two sides.

Energy Harvesting with the EnerChip™ CC

The EnerChip™ CC can be configured to collect energy from transducers such as low power photovoltaic (PV) cells and use that harvested energy to charge the integrated EnerChip™ and deliver self-sustaining power to components such as microcontrollers, sensors, and radios in wireless systems. The schematic of Figure 13 illustrates the feedback connection made from RESET to EN to implement the energy harvesting function with the CCBC3150. In order to make most efficient use of the power available from the transducer (for example, a PV cell), it is necessary to know the electrical characteristics including voltage and peak power point of the transducer being used. For assistance in designing your system to effectively harvest energy from a power transducer in a specific environment, contact Cardinal Components, Inc.

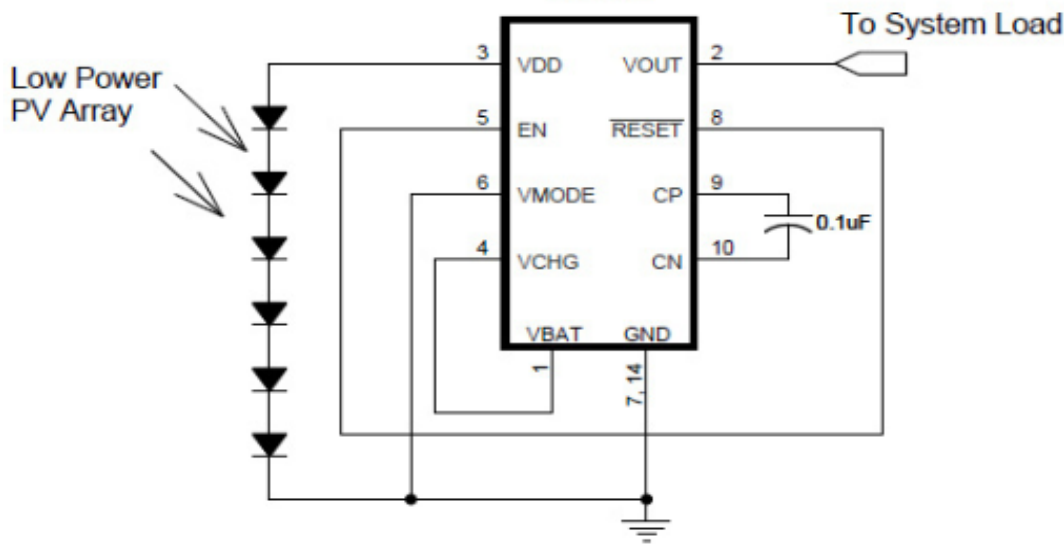


Figure 13: Implementing Energy Harvesting with the EnerChip™ CC

Disclaimer of Warranties; As Is

The information provided in this data sheet is provided "As Is" and Cardinal Components Inc. disclaims all representations or warranties of any kind, express or implied, relating to this data sheet and the Cardinal Components Inc. EnerChip™ product described herein, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, non-infringement, title, or any warranties arising out of course of dealing, course of performance, or usage of trade. Cardinal Components Inc. EnerChip™ products are not approved for use in life critical applications. Users shall confirm suitability of the Cardinal Components Inc. EnerChip™ product in any products or applications in which the Cardinal Components Inc. EnerChip™ product is adopted for use and are solely responsible for all legal, regulatory, and safety-related requirements concerning their products and applications and any use of the Cardinal Components Inc. EnerChip™ product described herein in any such product or applications. EnerChip™ is a Trademark of Cymbet Corporation.