



CJAL3  
3.2 x 2.5 x 0.9 mm  
Leadless Ceramic Package

### Features

- Quartz crystal controlled PLL Based Square Wave Oscillator
- LVDS Output
- Enable/Disable Function on pad 1
- Low Jitter
- 2.5V and 3.3V Supply Voltage

### Applications

Driving A/Ds, D/As, FPGAs  
Fibre Channel  
Ethernet, GbE, SynchE  
Medical  
Storage Area Networking  
COTS  
Telecom  
PON

### Electrical Characteristics

Parameter	Min	Typ	Max	Unit	Condition
Frequency Range	10		1500	MHz	
Frequency Stability	±25	-	±50	ppm	Includes V <sub>cc</sub> change, load change, 1 year aging at 25°C ± 2°C, shock, vibration, 25°C tolerance and operating temperature
Operating Temperature Range	-20 -40	-	+70 +85	°C	
Storage Temperature Range	-55		+125	°C	
Supply Voltage <sup>1</sup> V <sub>CC</sub>	2.375 2.97	2.5 3.3	2.625 3.63	V	TV <sub>cc</sub> ramp = 100µs min
Supply Current I <sub>CC</sub>	-		40 50	mA	2.5V 3.3V
Output Waveform	LVDS				Load = 100Ω. Recommended termination is DC-Coupled (Point to Point)
Differential Output Voltage (VOD)	175	350		mV	
Offset Voltage (VOS)		1.25		V	
Output TRISE and TFALL			0.5	ns	V <sub>th</sub> is 10% and 90% of VOD
Disable Current		16		mA	When output disabled (pin 1 low)
Startup Time	-	-	10	ms	Time for output to reach specified frequency
Duty Cycle	45	-	55	%	At output crossing point
V <sub>DISABLE</sub>	-	-	0.3*V <sub>cc</sub>	V	Referenced to Ground
V <sub>ENABLE</sub>	0.7*V <sub>cc</sub>	-	-		
Phase Noise	100Hz 1kHz 10kHz 100kHz 1MHz 5MHz 20MHz	-95 -111 -116 -117 -137 -140 -150	-	dBc/Hz	25°C ± 2°C, 3.3V, 156.25MHz
Phase Jitter	-	1	-	ps rms	12 kHz to 20 MHz from the output frequency

### Part Number


**Example: CJAL3LZ-A7BP-100.0TS**

Series Model	Output	Package Size	Supply Voltage	Packaging	Operating Temperature Range	Frequency Stability	Frequency (MHz)	Output Control
CJA	L	3	L	Z	A7	BP	100.0	TS
	L = LVDS	3 = 3.2x2.5mm	S = 2.5V L = 3.3V	Blank = Tape only Z = Tape/Reel	A5 = -20 to +70°C A7 = -40 to +85°C	BR = ±25ppm BP = ±50ppm		TS=TRISTATE

Notes: Specifications with Pad 1 E/D open circuit

<sup>1</sup> Place an appropriate power supply bypass capacitor next to device for correct operation


### Mechanical Dimensions

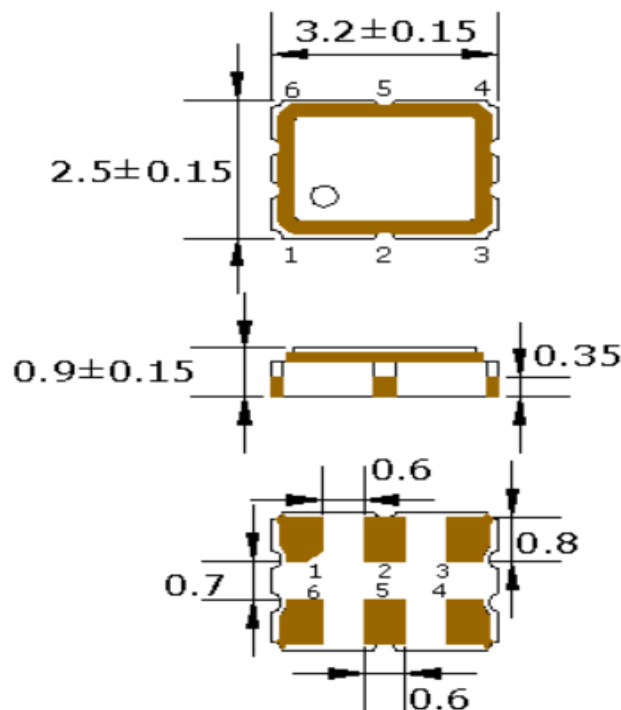

Castellations on pads 2 and 5 may or may not be present

Pin Connections	
PIN#	Function
1	Enable/Disable
2	No connect
3	Ground/Lid
4	Output
5	Output N
6	Voc

ENABLE/DISABLE	
PIN1	Output
VH/Open	Active
VL/Gnd	Disabled/Tristate

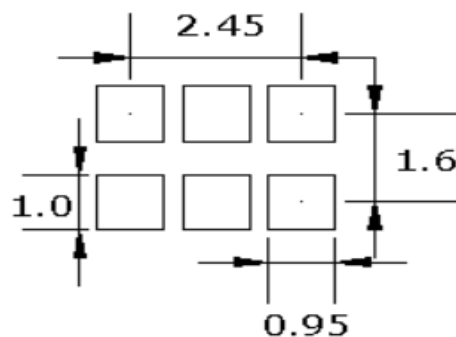


#### Pad Layout

Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

### Dimensions in mm

Contacts (pads): Gold (0.3 to 1.0  $\mu\text{m}$ ) over Nickel (1.27 to 8.89  $\mu\text{m}$ )



### Recommended Termination

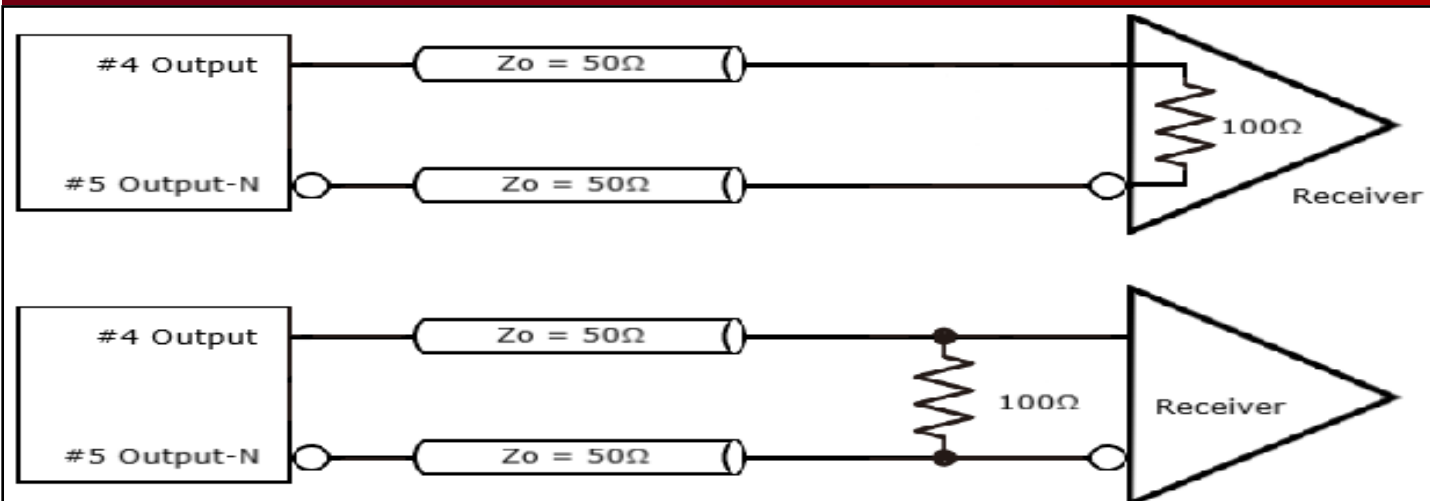

For any other terminations, the oscillator should be sampled and tested in the application. Both outputs shall be terminated and biased for proper operation.

For Optimum Jitter Performance, Cardinal recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans

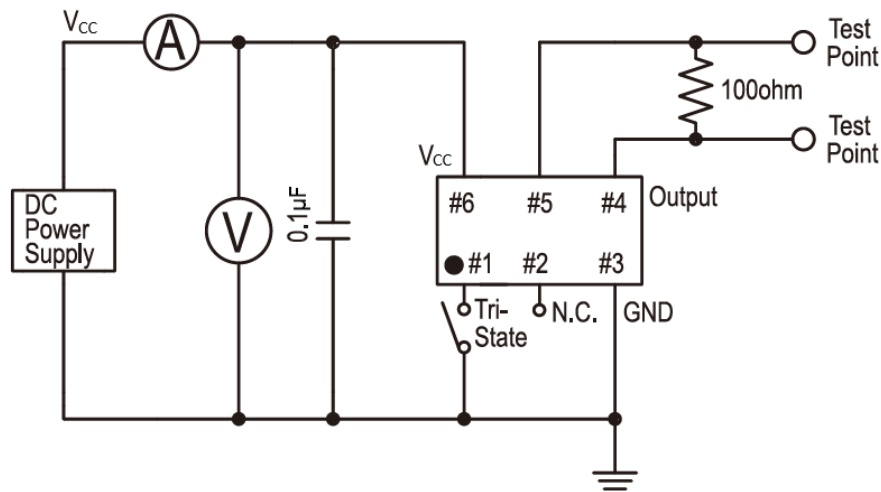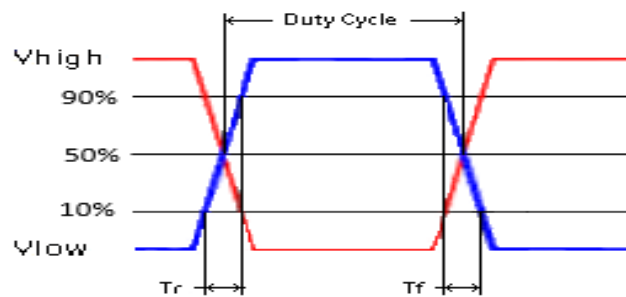**Electrical Test /Load Circuit**

**Test Waveform**

**Environmental/ESD**

Reliability: Environmental

Parameter	Reference Standard	Test Condition
Vibration	MIL-STD-883 2007 Condition A	10-2000Hz, 1.52mm, 20g, each axis for 4hrs
Thermal Shock	MIL-STD-883 1010 Condition B	-55°C, 125°C, soak time is 10 mins, with total 200 cycles
Mechanical Shock	MIL-STD-883 2002 Condition B	1500g, half-sine, 0.5ms, each axis for 3 times

Absolute Maximum Ratings

Parameter	Unit
V <sub>CC</sub> Supply Voltage	-0.5V to +4.2V
V <sub>i</sub> Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V
V <sub>o</sub> Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V
Max Junction Temperature	125°C

ESD Rating


Model	Min. Voltage	Condition
Human Body Model	2000V	JESD22-A114
Charged Device Model	1000V	JESD22-C101
Machine Model	120V	JESD22-A115

**Cardinal Components certifies this device is in accordance with the RoHS and REACH directives.**

Cardinal Components guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's  
 Weight of the Device: 0.029 grams  
 Moisture Sensitivity Level: 1 As defined in J-STD-020D  
 Second Level Interconnect code: e4

**Reflow Cycle**

Maximum Reflow Conditions in accordance with IPC/JEDEC J-STD-020C "Pb-free"


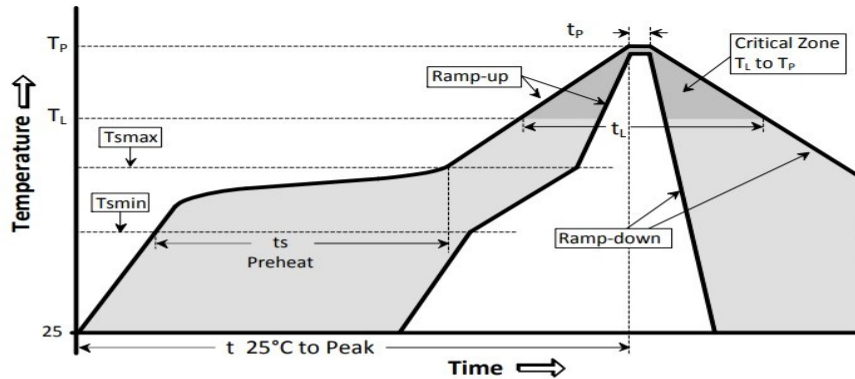


The part may be reflowed 2 times without degradation (typical for lead free processing).

Temperature Profile	Symbol	Condition	Unit
Average ramp-up rate	(T <sub>smax</sub> to T <sub>p</sub> )	3°C / second max	°C / s
Ramp down Rate	T <sub>cool</sub>	6°C / second max	°C / s
Time 25°C to Peak Temperature	T <sub>to-peak</sub>	8 minutes max	min
<b>Preheat</b>			
Temperature min	T <sub>smin</sub>	150	°C
Temperature max	T <sub>smax</sub>	200	°C
Time T <sub>smin</sub> to T <sub>smax</sub>	ts	60 – 180	sec
<b>Soldering above liquidus</b>			
Temperature liquidus	T <sub>L</sub>	217	°C
Time above liquidus	t <sub>L</sub>	60 – 150	sec
<b>Peak temperature</b>			
Peak Temperature	T <sub>p</sub>	260	°C
Time within 5°C of peak temperature	t <sub>p</sub>	20 – 40	sec

**Tape and Reel**

Tape and Reel available for quantities of 250 to 3000 per reel, cut tape for < 250. 8mm tape, 4mm pitch.

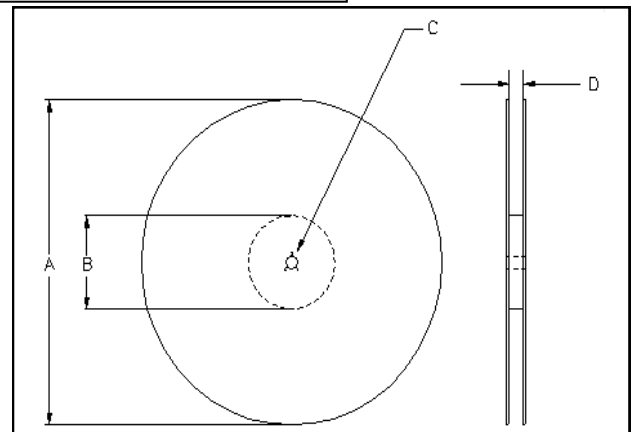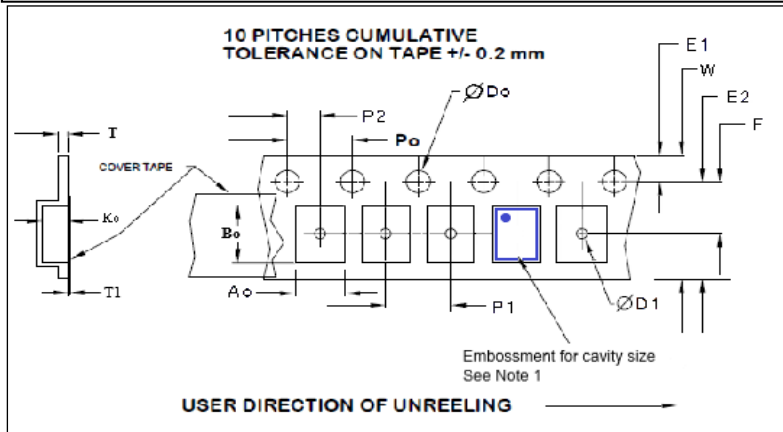

Tape Variable Dimensions Table 2

Tape Size	E2 typ	F	P1	W max	A0	B0	K0
8mm	6.25	3.5 ±0.05	4.0 ±0.1	8.2	2.7±0.1	3.4±0.1	1.4±0.1

Dimensions in mm Drawing Not to scale

Note 1: Embossed cavity to conform to EIA-481-B

Tape Constant Dimensions Table 1

Tape Size	Do	D1 min	E1	P0	P2	T max	T1 max
8mm	1.5 +0.1 -0.0	1.0	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	0.3	0.1

Reel Dimensions (may vary) Table 3

	A		B		C	D
Reel Size	Inches	mm	Inches	mm	mm	mm
7	7.0	180	2.50	60	13.0 +0.5 -0.2	Tape size +0.4 +2.0 -0.0

**Important Notice**

Cardinal Components (CC) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. CC reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to CC's terms and conditions of sale supplied at the time of order acknowledgment.

CC warrants performance of this product to the specifications applicable at the time of sale in accordance with CC's limited warranty. Testing and other quality control techniques are used to the extent CC deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

CC assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using CC components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

CC products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapons systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of CC products in such applications is understood to be fully at the risk of the customer. Use of CC products in such applications requires the written approval of an appropriate CC officer. Questions concerning potential risk applications should be directed to CC.

CC does not warrant or represent that any license, either express or implied, is granted under any CC patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which CC product or services are used. Information published by CC regarding third-party products or services does not constitute a license from CC to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from CC under the patents or other intellectual property of CC.

Reproduction of information in CC data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. CC is not responsible or liable for such altered documents.

Resale of CC products or services with statements different from or beyond the parameters stated by CC for that product or service voids all express and implied warranties for the associated CC product or service and is an unfair or deceptive business practice. CC is not responsible for any such statements.

**Contacting Cardinal Components**

Cardinal Components  
19013 36th Ave. West  
Lynnwood, WA 98036-5761  
U.S.A.

Tel: 973-785-1333  
Fax: 425.776.2760  
email: [sales@cardinalxtal.com](mailto:sales@cardinalxtal.com)  
URL: [www.cardinalxtal.com](http://www.cardinalxtal.com)