

COSJ7 Series
25.4 x 22.1 x 11.0 mm
7 Pad SMD Package

Features

- Ovenized Quartz Crystal High Precision Square Wave Generator
- HCMOS Output
- 3.3V nominal Supply Voltage
- 5.0MHz - 40MHz Frequency Range
- Voltage control option available
- SC cut crystal

Applications

SONET / SDH / DWDM
Test & Measurement
Telecom Transmission & Switching Equipment
Base Stations / Picocell
Wireless Communication Equipment

Electrical Characteristics

Parameter	Min	Typ	Max	Unit	Condition
Frequency	5	-	40	MHz	Standard frequencies are 10, 12.8, 15.36, 16.384, 19.2, 20, 25MHz
Frequency Stability vs Temperature	±10	-	±20	ppb	±5ppb available over temp range 0 to 70°C
Frequency Stability vs Supply	-	-	±0.5	ppb	±5% voltage change
Warm-up	-	-	±10	ppb	In 2 minutes @ +25°C, referenced to 1 hour
Aging	-	-	±0.5	ppb	per day at time of shipment
	-	-	±50	ppb	per year
	-	-	±0.4	ppm	10 years
Operating Temperature Range	-40	-	+85	°C	
Supply Voltage ¹ V _{CC}	3.135	3.30	3.465	V	5.0V input voltage available
Current	-	-	1000	mA	@turn on
Steady State	-	-	1.2	W	@ 25°C
Spurious	-	-	-60	dBc	
Phase Noise					
	10 Hz	-115			
	100 Hz	-130			
	1 kHz	-140			
	10 kHz	-150			
Storage Temperature Range	-55	-	+125	°C	
Vcontrol Range (If Vc option selected)	0	1.4	2.8	V	
Pullability (If Vc option selected)	±0.5	-	-	ppm	Slope positive
Input Impedance (If Vc option selected)	100	-	-	kΩ	
Reference Voltage (If option selected)	2.7	2.8	2.9	V	
Reference Voltage Load	9	-	-	kΩ	

HCMOS

Parameter	Min	Typ	Max	Unit	Condition
Output Waveform	HCMOS				Sinewave output is available
"1" Level	2.4	3.3	-	V	
"0" Level	-	-	0.4	V	
Load	-	15	-	pF	
Duty Cycle	45	50	55	%	@1.4V

Note: ¹ Place a 10nF power supply bypass capacitor next to device for correct operation

Device Marking

COSJ7xxx	COSJ7xxx	= Model number/Part number*
xx.xxM	xx.xxM	= Frequency (M = MHz)
YMDz	YMD	= Date code (Year-Month-Day: See Table below)
S/N: xxx	z	= Internal Code
	S/N: xxx	= Serial number

* A unique number is assigned for your exact specifications.
Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from marking.
External packaging labels and packing list will correctly identify the ordered Cardinal part number.

Codes for Date Code YMD (Year Month Day)

Code	3	4	5	6	7	Code	A	B	C	D	E	F	G	H	J	K	L	M
Year	2023	2024	2025	2026	2027	Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC

Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	U	V	W	X	Y	Z
Day	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31

Environmental / ESD Ratings

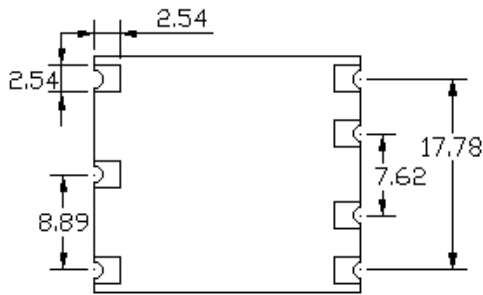
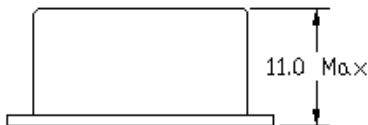
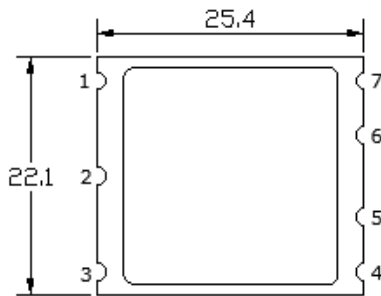
Reliability: Environmental

Parameter	Ref Standard	Condition
Solderability	MIL-STD-202, Method 208	
Mechanical Shock	MIL-STD-202, Method 213 Test Cond J	30g, 11ms, half-sine
Vibration	MIL-STD-202, Method 201	1.52mm p-p Total, 10 to 55 Hz
Thermal Shock	MIL-STD-202, Method 107 Test Cond B	5 cycles -65 to +125°C

Model	Min Voltage
Human Body Model	2000V
Machine Model	200V


Cardinal Components Inc. certifies this device is in accordance with the RoHS (exemptions 6c, 7c-i) and REACH directives.

Cardinal guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Mercury, PBB's, PBDE's
Moisture Sensitivity Level: 1 As defined in J-STD-020D
Second Level Interconnect code: e4
Product Weight: 6.6g

Mechanical Dimensions

PIN CONNECTIONS

Pin	Function
1*	Vc input or N.C.
2*	Ref Voltage or N.C.
3	Vcc
4	Output
5	N.C.
6	N.C.
7	Ground/Case

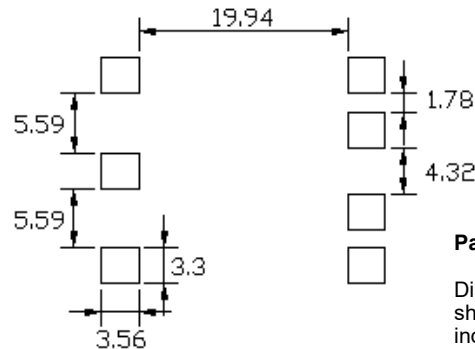* If not specified in parameters then not internally connected

Recommended Solder Layout

Pad Layout

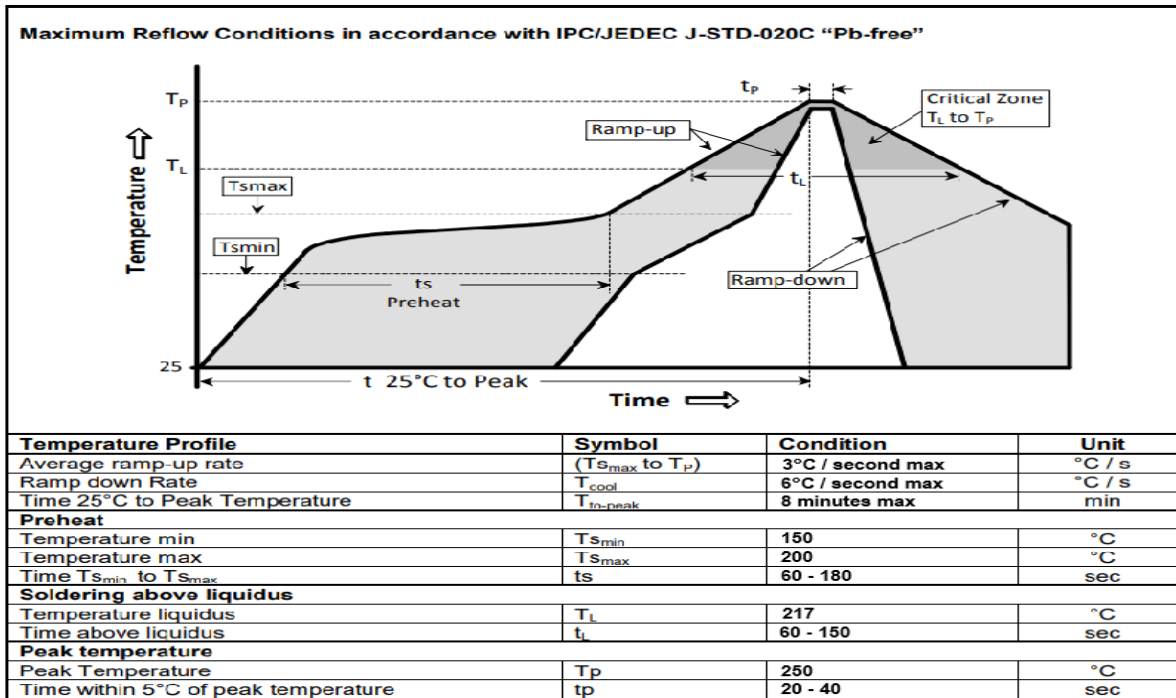
Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

Contacts (pads): ENIG


For Optimum Jitter Performance, Cardinal recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans
- Minimize air flow across the device

Reflow Profile



Tape and Reel (200pcs max per reel)

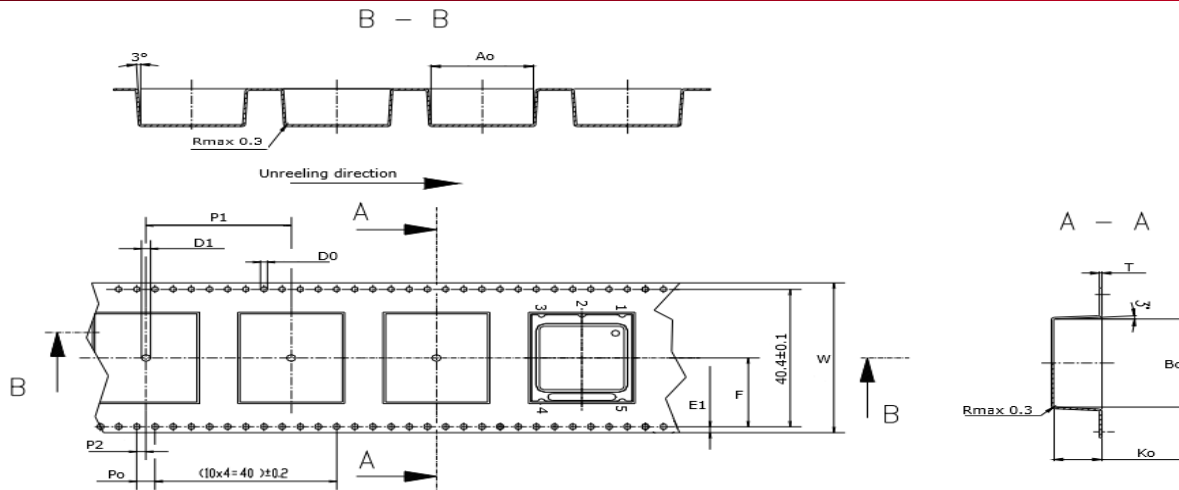

Tape Variable Dimensions Table 2

Tape Size	F	P1	W max	Ao	Bo	Ko
44mm	20.2 ±0.15	32.0 ±0.1	44.3	23±0.1	26±0.1	11 typ

Dimensions in mm Drawing Not to scale


Note 1: Embossed cavity to conform to EIA-481-B

Tape Constant Dimensions Table 1

Tape Size	Do	D1 typ	E1	Po	P2	S1 min	T max	T1 max
44mm	1.5 +0.1 -0.0	2.0	1.75 ±0.1	4.0 ±0.1	2.0 ±0.1	0.6	0.55	0.1

Reel Dimensions (may vary) Table 3

Reel Size	A	B	C	D
mm	mm	mm	mm	mm
13	330±2	100±4	13.2 ±0.2	44.4 +2.0/-0.0

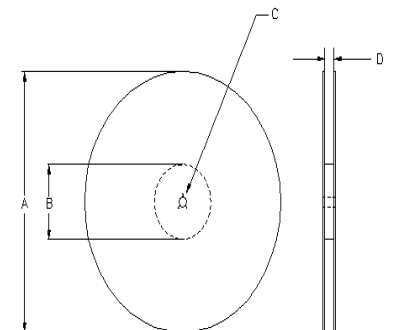

Important Notice

Cardinal Components (CC) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. CC reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to CC's terms and conditions of sale supplied at the time of order acknowledgment.

CC warrants performance of this product to the specifications applicable at the time of sale in accordance with CC's limited warranty. Testing and other quality control techniques are used to the extent CC deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

CC assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using CC components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

CC products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of CC products in such applications is understood to be fully at the risk of the customer. Use of CC products in such applications requires the written approval of an appropriate CC officer. Questions concerning potential risk applications should be directed to CC.

CC does not warrant or represent that any license, either express or implied, is granted under any CC patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which CC product or services are used. Information published by CC regarding third-party products or services does not constitute a license from CC to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from CC under the patents or other intellectual property of CC.

Reproduction of information in CC data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. CC is not responsible or liable for such altered documents.

Resale of CC products or services with statements different from or beyond the parameters stated by CC for that product or service voids all express and implied warranties for the associated CC product or service and is an unfair or deceptive business practice. CC is not responsible for any such statements.

Contacting Cardinal Components

Cardinal Components
19013 36th Ave. West
Lynnwood, WA 98036-5761
U.S.A.

Tel: 973-785-1333
Fax: 425.776.2760
email: sales@cardinalxtal.com
URL: www.cardinalxtal.com