


## **CPP\_7 Series CMOS Clock Oscillator**







## **Features**

- CMOS Output (will interface with TTL devices)
- Enable/Disable Function (optional Standby function)
- 3.3V or 5.0V nominal Supply Voltage
- Size: 7 x 5mm
- Factory programmed

## **Applications**

Driving A/Ds, D/As, FPGAs Digital Video Ethernet, GbE Medical Storage Area Networking COTS **Broad Band Access** SONET/SDH/DWDM **Test & Measurement** 

<b>Electrical Characteristics</b>							
Parameter	Min	Тур	Max	Unit	Condition		
Frequency Range	1	-	133	MHz	(3.3V: 1 - 100MHz)		
Frequency Stability <sup>2</sup>	±25	-	±100	ppm	Includes supply voltage change, load changes, aging for 1 year at 25°C ± 2°C, shock, vibration and temperatures.		
Operating Temperature Range options <sup>2</sup>	0 -20 -40	-	+70 +70 +85	°C			
Supply Voltage <sup>1, 2</sup> V <sub>DD</sub>	2.97	-	5.5	٧	See Part Number options on page 2		
Supply Current I <sub>DD</sub> (No Load)	-	-	45 25	mA	V <sub>DD</sub> = 5.0V V <sub>DD</sub> = 3.3V		
Output Type		СМС	os		Cload = 50pF max, VDD = 4.5~5.5V, ≤66MHz Cload = 25pF max, VDD = 4.5~5.5V, >66MHz Cload = 30pF max, VDD = 3.0~3.6V, ≤40MHz Cload = 15pF max, VDD = 3.0~3.6V, >40MHz		
		TTI	-		Cload = 50pF max; VDD = 4.5~5.5V, ≤40MHz		
Duty Cycle	-	-	-	%	See Page 2		
Output V <sub>OH</sub> (TTL Level)	2.4	-	-	V	VDD = 4.5~5.5V		
(CMOS Level)	VDD - 0.4			V	All voltages		
Output V <sub>OL</sub>	-	-	0.4	V	See Load Circuit and waveform page		
Output T <sub>RISE</sub> and T <sub>FALL</sub>	-	-	-	ns	See page 2		
Startup Time	-	-	2	ms	Time for output to reach specified frequency		
V <sub>DISABLE</sub>	-	-	0.8 0.2V <sub>DD</sub>	\ \ \	VDD = 4.5~5.5V VDD = 3.0~3.6V		
V <sub>ENABLE</sub>	2.0 0.7Vpd	-			VDD = 4.5~5.5V VDD = 3.0~3.6V		
Enable Time	-	-	2	ms			
Disable Time - Pin 1 low to Output Hi-Z	-	T/2	T+10	ns	T = Frequency Period		
Disable Current		0.4	-	mA	Enable/Disable: Pad 1 low, output disabled; See above Supply Current Standby option: Pad 1 low, output disabled, oscillator shutdown		
RMS Period Jitter	-	40 30	50 40	ps	≤33MHz >33MHz		
Period Jitter, Pk-Pk		100 75	250 175	ps	>1,000,000 samples ≤33MHz >33MHz		
Storage Temperature Range	-55	-	+125	°C			

Notes: Specifications with Pad 1 E/D open circuit

1 Place an appropriate power supply bypass capacitor next to device for correct operation

<sup>&</sup>lt;sup>2</sup> Specified by part number



# CPP\_7 Series CMOS Clock Oscillator

Duty Cycle					
Parameter	Min	Тур	Max	Unit	
TTL @1.4V level; VDD = 4.5~5.5V	45 45 40 40		55 55 60 60	%	Fo ≤ 50 MHz, CL ≤ 50pF 50 MHz < Fo ≤ 66MHz; CL ≤ 15pF 66 MHz < Fo ≤ 125MHz, CL ≤ 25pF 125 MHz < Fo ≤ 133MHz, CL ≤ 15pF
Parameter	Min	Тур	Max	Unit	
CMOS @ 0.5Vpd level; Vpd = 4.5~5.5V	45 40 40		55 60 60	%	Fo ≤ 66 MHz, CL ≤ 25pF 66 MHz < Fo ≤ 125MHz; CL ≤ 25pF 125 MHz < Fo ≤ 133MHz, CL ≤ 15pF
Parameter	Min	Тур	Max	Unit	
CMOS @ 0.5Vpd level; Vpd = 3.0~3.6V	45 40		55 60	%	Fo ≤ 40 MHz, CL ≤ 30pF 40 MHz < Fo ≤ 100MHz; CL ≤ 15pF

Rise/Fall Time								
Parameter	Min	Тур	Max	Unit				
Rise/Fall Time			1.8 1.2 0.9 3.4 4.0 2.4	ns	0.8V~2.0V, VDD = 4.5~5.5V, CL=50pF 0.8V~2.0V, VDD = 4.5~5.5V, CL=25pF 0.8V~2.0V, VDD = 4.5~5.5V, CL=15pF 0.2VDD~0.8VDD, VDD = 4.5~5.5V, CL=50pF 0.2VDD~0.8VDD, VDD = 3.0~3.6V, CL=30pF 0.2VDD~0.8VDD, VDD = 3.0~3.6V, CL=15pF			


Part Nu	Part Number Example: CPPC7LZ-A7BP-50.0TS										
Series Model	Logic	Package Size (mm)	Supply Voltage V <sub>CC</sub>	Packaging	Operating Temperature Range	Frequency Stability (ppm)	Frequency (MHz)	Enable/Disable			
СРР	С	7	L	Z	<b>A</b> 7	ВР	50.0	TS			
	C=CMOS T = TTL	7 = 7 x 5	<b>L = 3.3V</b> Blank= 5.0V	Blank = Tape Only Z= Tape/reel	Blank = 0 to +70°C A5 = -20 to +70°C A7 = -40 to +85°C	BR = ±25 <b>BP = ±50</b> B6 = ±100	5V: 1 - 133 3.3V: 1 - 100	TS = Tristate PD = Powerdown			




## CPP\_7 Series CMOS Clock Oscillator

## **Mechanical Dimensions (mm)**

### TOP VIEW 1




## [BOTTOM VIEW]

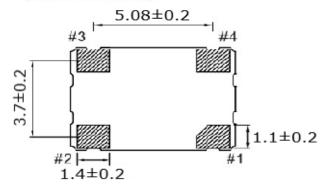

## [SIDE VIEW]



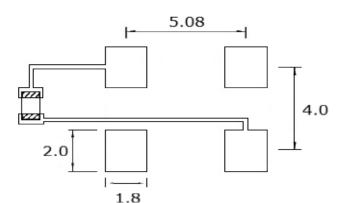

Pin#	Function
1	Enable/disable
2	Gnd
3	Output
4	Vcc

Enable/Disable						
Pin 1	Output					
Open	Active					
Logic '1'	Active					
Ground / Logic '0'	Tristate					

#### Pad Layout

Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

To ensure optimal oscillator performance, place a by-pass capacitor of  $0.01 \sim 0.1 \mu F$  as close to the part as possible between  $V_{CC}$  and GND pads.

Contacts (pads): Gold (0.3 to 1.0 µm) over Nickel (1.27 to 8.89 µm)

## Cardinal Components Inc. certifies this device is in accordance with the RoHS and REACH directives.

Cardinal Components guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's Weight of the Device: 0.16 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020D

Second Level Interconnect code: e4


For Optimum Jitter Performance, Cardinal recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans




## CPP\_7 Series CMOS Clock Oscillator

## **Electrical Test / Load Circuit**

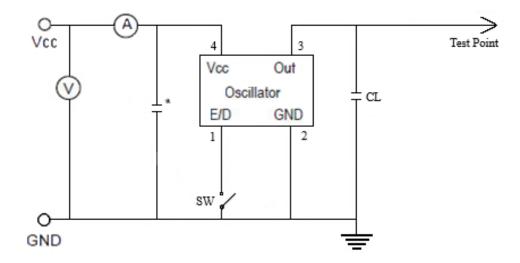

#### Notes

CL: 15pF Includes the input capacitance of oscilloscope  $^*$  0.01 $^-$ 0.1 $\mu$ F external by-pass filter is recommended

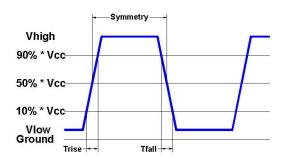

## **Environmental / ESD Ratings**

Reliability: Environmental

Parameter	Condition
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	IPC J-STD-002
Thermal Cycle	MIL-STD-883 Method 1010, Condition B

## Thermal Characteristics:

The maximum die or junction temperature is 100°C

### **ESD Rating**

Model	Min. Voltage	Condition		
Human Body Model	2000V	MIL-STD-883 3015.7		
Machine Model	200V	EIAJ ED-4701/304		


## Absolute Maximum Ratings

Parameter	Unit				
V <sub>CC</sub> Supply Voltage	-0.5V to +7.0V				
Vi Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V				
Vo Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V				



## CPP\_7 Series CMOS Clock Oscillator


## **Reflow Cycle**

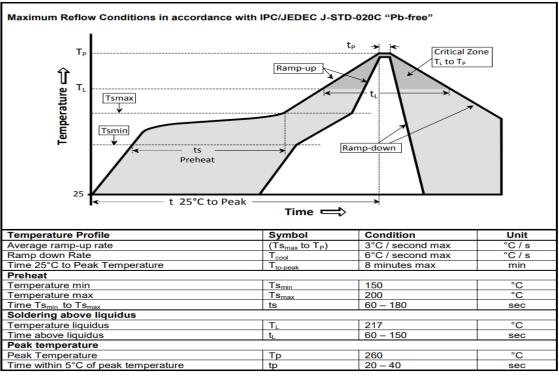

The part may be reflowed 2 times without degradation (typical for lead free processing).

## Tape and Reel


Tape and Reel available for quantities of 250 to 1000 per reel, cut tape for < 250. 16mm tape, 8mm pitch.

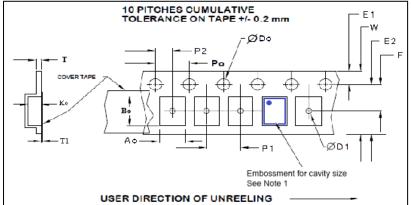

Tape Variable Dimensions Table 2									
						Qty/reel standard			
7050	16mm	14.25	7.5 ±0.05	8.0 ±0.1	16.3	5.56±0.1	7.85±0.1	2±0.1	1K

Dimensions in mm Drawings Not to scale
Note 1: Embossed cavity to conform to EIA- 481-B

Tape Constant Dimensions Table 1									
Tape Size	Do	D1 typ	E1	Ро	P2	T typ	T1 max		
16mm	1.5 +0.1 -0.0	1.5	1.75 ±0.1	4.0 ±0.1	2.0 ±0.1	0.3	0.1		

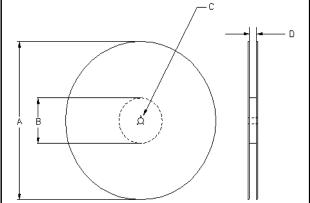

	Reel Dimensions (may vary) Table 3									
		A	В		С	D				
Reel Size	Inches	mm	Inches	mm	mm	mm				
7	7.0	180	2.50	60	13.0	Tape size +0.4				
13	13.0	330	3.75	100	+0.5 -0.2	+2.0 -0.0				



## CPP\_7 Series CMOS Clock Oscillator

### **Important Notice**

Cardinal Components (CC) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. CC reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to CC's terms and conditions of sale supplied at the time of order acknowledgment.

CC warrants performance of this product to the specifications applicable at the time of sale in accordance with CC's limited warranty. Testing and other quality control techniques are used to the extent CC deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

CC assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using CC components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

CC products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of CC products in such applications is understood to be fully at the risk of the customer. Use of CC products in such applications requires the written approval of an appropriate CC officer. Questions concerning potential risk applications should be directed to CC.

CC does not warrant or represent that any license, either express or implied, is granted under any CC patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which CC product or services are used. Information published by CC regarding third-party products or services does not constitute a license from CC to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from CC under the patents or other intellectual property of CC.

Reproduction of information in CC data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. CC is not responsible or liable for such altered documents.

Resale of CC products or services with statements different from or beyond the parameters stated by CC for that product or service voids all express and implied warranties for the associated CC product or service and is an unfair or deceptive business practice. CC is not responsible for any such statements.

### **Contacting Cardinal Components**

Cardinal Components 19013 36th Ave. West Lynnwood, WA 98036-5761 U.S.A. Tel: 973-785-1333 Fax: 425.776.2760

email: sales@cardinalxtal.com

URL: www.cardinalxtal.com